



MAXIMUM DEMAND AMMETERS



45B

For measuring the maximum current in period of 8 or 15 min.
 The red slave maximum pointer remains always at the maximum.
 The pointer can be resetted by the white reset knob on the front.
 The instruments have interchangeable scales.

Technical data:

Ranges: 1A + 20% = 1.2A
 5A + 20% = 6A

Class of accuracy: ±3 %

Case: plastic, non flammable, UL 94-V1

Connections: screw terminals for cable up to 8 mm²

Mounting: rail 35 mm (EN 50022)

Weight: max. 0.2 kg




AMMETERS

Meas. range	Frame dimensions	
	45x45 mm	
	Type: 45B	
	Response time	consumption.
* ■ ... /1 A	8 min	3 VA
* ■ ... /1 A	15 min	3 VA
* ■ ... /5 A	8 min	3 VA
* ■ ... /5 A	15 min	3 VA

- Standard ranges.
- * for use with current transformers

Note: On request orders for types different from table are accepted.

Scales for CT. use		
Primary currents of the CT		
10 A	125 A	1200 A
15 A	150 A	1250 A
20 A	200 A	1500 A
25 A	250 A	1600 A
30 A	300 A	2000 A
40 A	400 A	2500 A
50 A	500 A	3000 A
60 A	600 A	4000 A
75 A	750 A	5000 A
80 A	800 A	6000 A
100 A	1000 A	8000 A

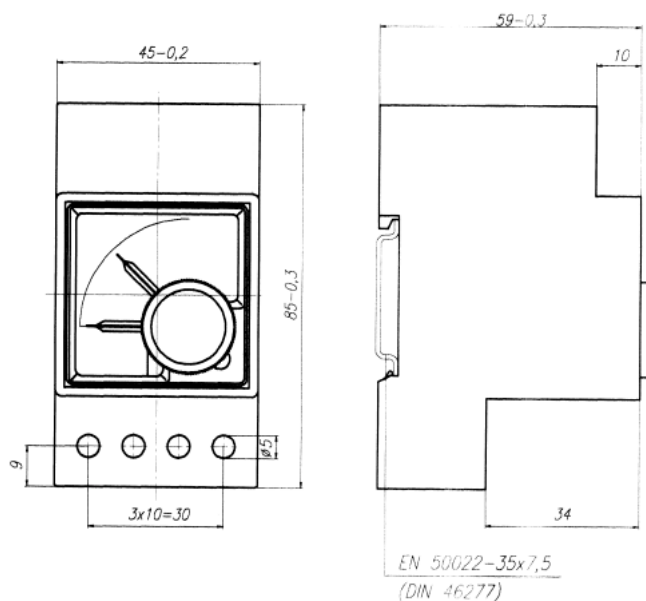

Scale M=1:1

